

HVAC | INDUSTRIAL PLANT | FACILITY | FOOD & BEVERAGE

GOODWAY®

INNOVATIVE & TECHNOLOGY-DRIVEN
MAINTENANCE SOLUTIONS



ALL NEW REDESIGNED
TUBE CLEANERS.
SEE PAGE 6 FOR DETAILS




Proud Recipients of the Presidents'
Excellence in Exporting "E" Award

INDUSTRIAL VACUUMS



SPECIFICATIONS	VAC-2A	VAC-3A	DV-3-SSH	VAC-2-HEPA
Motor(s)	Twin	Tripple	Triple	Twin
Motor Power	1,9 kW (total)	2,9 kW (total)	2,2 kW (total)	2 kW (Total)
Input Power	Standard: 13 amps, 115V, 50/60 Hz AC Optional: 6.5 amps, 230V, 50/60 Hz	10 amps, 230V, 50/60 Hz AC	18.2 amps, 115V, 50/60 Hz AC	Standard: 13 Amps, 115 V, 50/60 Hz AC; Optional: 6,5 Amps, 230 V, 50/60 Hz AC
Power Supply Cord	11,2 m, 14-3	11,2 m, 14-3	9,1 m, 12-3	11,3 m, 14-3
Air Requirements	-	-	-	-
Air Line	-	-	-	-
Static Water Lift	1676,4 mm	1676,4 mm	2057,4 mm	1676,4 mm
Air Displacement	305,8 m ³ /h	416 m ³ /h	485 m ³ /h	255 m ³ /h
Filtration	15 microns polypropylene and 15 microns dacron	15 microns polypropylene and 15 microns dacron	3 microns polyester pocket and 0.3 microns HEPA	5 microns paper, 5 microns paper and 0,3 microns HEPA
Tank	56,7 liter stainless steel tank, or 113,5 or 208,1 liter bonderized steel drum	56,7 liter stainless steel tank, or 113,5 or 208,1 liter bonderized steel drum	60,5 liter stainless steel	75,7 liters stainless steel
Dry Capacity	52,9 liter	52,9 liter	60,5 liter	18,9 liters
Wet Capacity	37,8 liter	37,8 liter	-	45,4 liters
Noise Level	78 dBA	78 dBA	78 dBA	74 dBA
Special Features	-	-	HEPA filter Detachable roll-out collection tank	HEPA filter Disposable collection bag
Dimensions	381 mm tank x 914,4 mm high (VAC-2-15SS)	381 mm tank x 914,4 mm high (VAC-3A-15SS)	63.5 mm diameter tank x 1244,6 mm (H)	1016 mm (H) x 381 mm (D)
Weight	11,3 Kg (head only) and 29,9 Kg (VAC-2-15SS)	13,1 Kg (head only) and 31,7 Kg (VAC-3A-15SS)	65,7 Kg	29 Kg

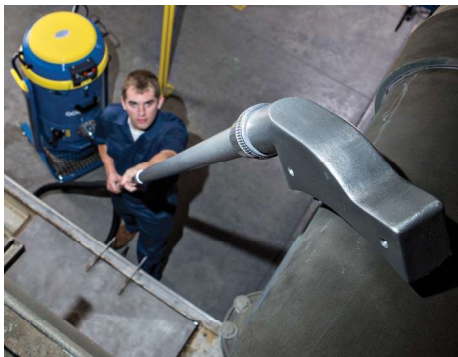

INDUSTRIAL VACUUMS




SPECIFICATIONS	DV-E3	DV-Z75	AV-1200-15SS
Motor(s)	Triple	Single	Pneumatic Venturi
Motor Power	3,4 kW (Total)	3.3 kW (Total)	–
Input Power	Standard: 13 Amps, 230 V, 50/60 Hz AC; Optional: 22,5 Amps, 115 V, 50/60 Hz AC	Standard: 14 amps, 230V, 50/60 Hz AC, three phase; Optional: 7 amps, 460V, 50/60 Hz, three phase	–
Power Supply Cord	9,1 m, 14-3	30', 14-4	–
Air Requirements	–	-	Minimum 3,4 BAR at 59 m ³ /h, Maximum 6,2 BAR at 85 m ³ /h
Air Line	–	-	12,7 mm I.D, or larger
Static Water Lift	2286 mm	100"	4318 mm at 6,2 BAR
Air Displacement	600 m ³ /h	369 m ³ /h	212 m ³ /h at 6,2 BAR
Filtration	Standard: 3 microns polyester pocket; Optional: 1 micron anti-static pocket and 0,3 microns HEPA	Standard: 1 micron polyester pocket; Optional: 0.3 microns HEPA	15 microns polypropylene and 15 microns dacron
Pump Flow	-	-	–
Tank	102,2 liters bonderized steel	27 gallons bonderized steel	57 liters stainless steel
Dry Capacity	102,2 liters	27 gallons	53 liters
Wet Capacity	98,4 liters	26 gallons	38 liters
Noise Level	78 dBA	77 dBA	84 dBA
Special Features	External filter shaker Roll-out tank	Continuous dry blower motor; External filter shaker; Roll-out tank	Air Powered
Dimensions	1524 mm (H) x 521 mm (D)	20 1/2" diameter tank x 63" high	914 mm (H) x 381 mm (D)
Weight	82 Kg	275 lbs	26 Kg



THE FOOD PROCESSOR'S HEPA VACUUM



HEPA VACUUMS



Visit goodway.com

COLOR CODED DUSTING BRUSHES



DV-3-SSH – High Flow. High Lift.

Ideal for the dry food processing industry, the DV-3-SSH stainless steel HEPA vacuum features three heavy-duty motors, delivering an airflow of 486 m³/h and 205mm of static water lift. Vacuumed dry debris passes through a 3 micron efficient polyester pocket filter with expanded surface area and then through a HEPA certified 0.3 micron cartridge filter. Collected material is held in a 53 liters stainless steel tank.

This rugged vacuum is available with a variety of accessories. It is the perfect choice for the recovery of fine dry material like whey, cheese, flour, sugar, tea and coffee dust.

FEATURES

- Three heavy-duty motors
- Large HEPA filter
- Reusable pocket pre-filter
- Detachable roll-out stainless steel collection tank
- External filter shaker
- Tool basket
- 38.1mm, 50.8mm or 76.2 hoses

CARBON FIBER VACUUM ACCESSORY KITS

These lightweight kits include an anti-static carbon-fiber wand and other versatile attachments that help clean walls, overhead beams, piping, and other hard-to-reach areas. Simple to use and attachments can be changed quickly and easily to save time and reduce costs, with no extra equipment needed.



VAC-KIT-DIV2-D

VAC-KIT-DIV2-D: (For DV vacuums), includes carry bag.

VAC-KIT-DIV2-T: (For VAC-EX, VAC-2, VAC-3, AV-1200, and GTC-540 vacuums), includes carry bag.

Visit www.goodway.com for more details!

DV-3-SSH: Industrial Dry HEPA Vacuum, including filters, external filter shaker, 60,5 liter detachable stainless steel tank, handles, casters and tool basket.

Note: Vacuum does not include accessories. Order accessories below or call or visit goodway.com for additional accessories.

SPECIFICATIONS	DV-3-SSH
Motor Power	3 HP (total)
Input Power	18.2 amps, 115V, 50/60 Hz AC
Power Supply Cord	9m, 12-3
Static Water Lift	205 mm
Air Displacement	486 m ³ /h
Filtration	3 microns polyester pocket and 0.3 microns HEPA
Tank	60,5 liters stainless steel
Dry Capacity	60,5 liters
Noise Level	78 dBA
Dimensions	520,7 mm diameter tank x 1245 mm high
Weight	65,7 Kg

DOUBLE YOUR PERFORMANCE WITH TWIN MOTORS



CE certification only applies to VAC-2A 230v model.

VAC-2-15SS

VAC-2-30-DD

VAC-2-55-DD

VAC-2 – Increased Suction

The VAC-2 features dual-motors for increased suction. Its power and versatility make it an ideal choice for a wide range of general shop cleanup tasks, from liquid recovery to picking up metal shavings. With specially designed adapter rings, the VAC-2 is compatible with 53 liter tanks or with 113,5 or 56,7 liter drums to suit the size of the cleanup jobs you encounter.

A wide array of options and configurations are also available to suit your unique applications.

ACCESSORIES:

VAC-KIT-9: 38,1 mm Industrial Vacuum Accessory Kit: 3,048 m Neoprene Wire Reinforced Hose, 101,6 mm Double Bend Wand, 1397 mm Extension Tube, 1,5 m Extension Tube, 355,6 mm Nylon Floor Brush, 355,6 mm Squeegee Floor Tool, 355,6 mm Rough Surface Fiber Shod Floor Tool, 203,2 mm Wall and Overhead Brush, and 685,8 mm Steel Crevice Tool.

DUMP VALVE (FACTORY INSTALLED):

DDV-100M: Full Flow Ball Valve, 25,4 mm.

DDV-E90: Elbow, 32° C.

DDV-675: Garden Hose Connector.

STORAGE POUCH:

VAC-TOOL-TOTE: Durabond Tool Storage Pouch.

REPLACEMENT FILTERS:

GTC-175: Polypropylene Filter, 15 microns.

GTC-176: Dacron Filter, 15 microns.

DISCHARGE PUMP:

The VAC-2-55-DD Industrial Vacuum is available with a 1/3 HP, 170,3 LPM, stainless steel internal pump for discharging recovered liquids.

VAC-2-55-PUMP: Same as VAC-2-55-DD, plus internal pump, discharge port and hose.

FEATURES

- Two heavy-duty motors
- Exhaust muffler
- Three tank sizes
- Liquid shut-off
- Metal deflector
- Reusable filters
- 38.1 mm or 50.8 mm hoses

VAC-2-15SS: Industrial Wet-Dry Vacuum, including filters, 56,7 liter stainless steel tank, handles, wheels and casters.

VAC-2-30*: Industrial Wet-Dry Vacuum, including filters and 457mm-508 mm diameter drum adapter ring (no drum).

VAC-2-30DD: Same as VAC-2-30, plus 113,5 liter bonderized steel drum and dolly.

VAC-2-55*: Industrial Wet-Dry Vacuum, including filters and 558 mm-609 mm diameter drum adapter ring (no drum).

VAC-2-55DD: Same as VAC-2-30, plus 208 liter bonderized steel drum and dolly.

***Note:** Fits any standard drum 113,5 liter or 208 liter depending on model.

Note: Vacuums do not include accessories. Order VAC-KIT-9, visit www.goodway.com for kits and accessories.

SPECIFICATIONS	VAC-2
Motor Power	2.7 HP (total)
Input Power	Standard: 13 amps, 115V, 50/60 Hz AC Optional: 6.5 amps, 230V, 50/60 Hz
Power Supply Cord	11,2 m, 14-3
Static Water Lift	1676 mm
Air Displacement	306 m ³ /h
Filtration	15 microns polypropylene and 15 microns dacron
Tank/Drum	56,7 liter stainless steel tank, or 113,5 or 208 liter bonderized steel drum
Dry Capacity	53 liter (stainless steel tank)
Wet Capacity	37,8 liter (stainless steel tank)
Noise Level	74 dBA
Dimensions	381 mm diameter tank x 914 mm high (VAC-2-15SS)
Weight	113,8 (head only) and 29,9 (VAC-2-15SS)

TRIPLE MOTORS FOR HIGH LIFT AND HIGH FLOW



VAC-3A-15SS



VAC-3A-30-DD



VAC-3A-55-DD



CE certification only applies to VAC-3A model.

VAC-3A – Superior Air Flow

Do you have a heavy-duty mess that other vacuums aren't quite up to? Three motors in the VAC-3A generate 1676,4 mm of static water lift while moving 416 m³/h of air. That translates into high-velocity cleaning of large volumes of dirt, debris and liquids pulled from your shop floor in seconds.

You also get a choice of 15, 30 or 55 gallon tank capacity for carting off the really tough jobs. Choose from a wide variety of available vacuum kits and tools to create the ultimate industrial wet-dry vacuum.



ACCESSORIES:

VAC-KIT-9:

38,1 mm Industrial Vacuum Accessory Kit: 3 m Neoprene Wire Reinforced Hose, 1371,6 mm Double Bend Wand, 1371,6 mm Extension Tube, 1,5 m Extension Tube, 355,6 mm Nylon Floor Brush, 355,6 mm Squeegee Floor Tool, 355,6 mm Rough Surface Fiber Shod Floor Tool, 203,2 mm Wall and Overhead Brush, and 685,8 mm Steel Crevice Tool

DUMP VALVE (FACTORY INSTALLED):

DDV-100M: Full Flow Ball Valve, 25,4 mm.

DDV-E90: Elbow, 90°.

DDV-675: Garden Hose Connector.

STORAGE POUCH:

VAC-TOOL-TOTE: Durabond Tool Storage Pouch.

REPLACEMENT FILTERS:

GTC-175: Polypropylene Filter, 15 microns.

GTC-176: Dacron Filter, 15 microns.

FEATURES

- Three heavy-duty motors
- Exhaust muffler
- Three tank sizes
- Liquid shut-off
- Metal deflector
- Reusable filters
- 12,7 mm or 50,8 mm hoses

VAC-3A-15SS: Industrial Wet-Dry Vacuum, including filters, 56,7 liter stainless steel tank, handles, wheels and casters.

VAC-3A-30: Industrial Wet-Dry Vacuum, including filters and 457,2-508 mm diameter drum adapter ring (no drum).

VAC-3A-30DD: Same as VAC-3A-30, plus 113,5 liter bonderized steel drum and dolly.

VAC-3A-55*: Industrial Wet-Dry Vacuum, including filters and 558,8-609,6 mm diameter drum adapter ring (no drum).

VAC-3A-55DD: Same as VAC-3A-55, plus 208,1 liter bonderized steel drum and dolly.

*Note: Fits any standard drum 113,5 L or 208,1 L depending on model.

VAC-3A	
Motor Power	2,8 kW
Input Power	10 amps, 230V, 50/60 Hz AC
Power Supply Cord	11,2 m, 14-3
Static Water Lift	1676,4 mm
Air Displacement	416 m ³ /h
Filtration	15 microns polypropylene and 15 microns dacron
Tank/Drum	56.7 liter stainless steel tank, or 113,5 or 208,1 liter bonderized steel drum
Dry Capacity	52,9 liter (stainless steel tank)
Wet Capacity	37,8 liter (stainless steel tank)
Noise Level	78 dBA
Dimensions	381 mm (D) x 914,4 (H) (VAC-3A-15SS)
Weight	13,1 Kg (head only) and 31,7 Kg (VAC-3A-15SS)

THIS AIR VACUUM DOESN'T SKIMP ON POWER



AV-1200 – Safe and Powerful

For situations when electric power is unavailable or prohibited, the Air-powered AV-1200 is the preferred choice. Maintenance departments all over count on this dependable vacuum.

With the ability to devour 170 liters per minute, it handles all your high-volume liquid recovery needs. From machine oil to coolant and metal chips to fine powders, no matter what your clean up entails, the AV-1200 is up to the task.

FEATURES

- Air-powered
- No moving parts
- Three tank sizes
- Liquid shut-off
- Metal deflector
- Reusable filters
- 38,1 mm or 50,8 mm hoses

AV-1200-15SS: Air-powered Wet-Dry Vacuum, including filters, 56,7 liter stainless steel tank, handles, wheels and casters.

AV-1200-30*: Air-powered Wet-Dry Vacuum, including filters and 457mm-508 mm diameter drum adapter ring (no drum).


AV-1200-30-DD: Same as AV-1200-30, plus 113,5 liter bonderized steel drum and dolly.

AV-1200-55*: Air-powered Wet-Dry Vacuum, including filters and 558 mm-609 mm diameter drum adapter ring (no drum).

AV-1200-55-DD: Same as AV-1200-55, plus 208 liter bonderized steel drum and dolly.

***Note:** Fits any standard drum 113,5 liter or 208 liter depending on model.

Note: Vacuums do not include accessories. Order VAC-KIT-9, visit www.goodway.com for kits and accessories.

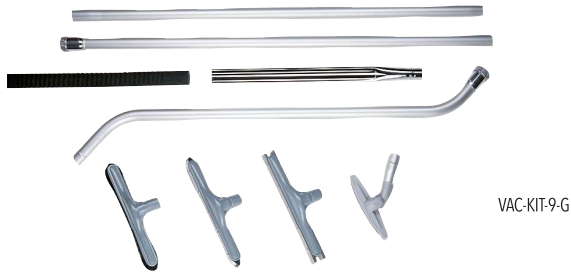

ACCESSORIES:

VAC-KIT-9-G: 38,1mm Grounded Industrial Vacuum Accessory Kit: 4,57m Neoprene Wire Reinforced Hose with Grounding Wire, 1371,6 mm Double Bend Wand, 1371 mm Extension Tube, 1,5m Extension Tube, 355,6 mm Nylon Floor Brush, 355,6 mm Squeegee Floor Tool, 355,6 mm Rough Surface Fiber Shod Floor Tool, 203 mm Wall and Overhead Brush, and 686 mm Steel Crevice Tool.

DUMP VALVE (FACTORY INSTALLED):

DDV-100M: Full Flow Ball Valve, 25,4mm.

DDV-E90: Elbow, 90°.

DDV-675: Garden Hose Connector.

STORAGE POUCH:

VAC-TOOL-TOTE: Durabond Tool Storage Pouch.

REPLACEMENT FILTERS:

GTC-175: Polypropylene Filter, 15 microns.

GTC-176: Dacron Filter, 15 microns.



SPECIFICATIONS	AV-1200
Air Requirements	Minimum 3,4 BAR at 35 CFM, Maximum 6,2 BAR at 50 CFM
Air Line	12,7 mm I.D. or larger
Static Water Lift	4318mm at 6,2 BAR
Air Displacement	212 m ³ /h at 6,2 BAR
Filtration	15 microns polypropylene and 15 microns dacron
Tank/Drum	56,7 liter stainless steel tank, or 113,5 or 208 liter bonderized steel drum
Dry Capacity	52,9 liters (stainless steel tank)
Wet Capacity	37,8 liters (stainless steel tank)
Noise Level	84 dBA
Dimensions	381 mm diameter tank x 914,4mm high (AV-1200-15SS)
Weight	10,8 Kg (head only) and 30 Kg (VAC-2-15SS)

INDISPENSABLE COMPACT HEPA INDUSTRIAL VACUUM



INDUSTRIAL VACUUMS



DETACHABLE COLLECTION DRUM FOR EASY DUMPING.

The Revolutionary E1 Industrial Vacuum Cleaner

The DP-E1-H Compact HEPA Industrial Vacuum is built tough to withstand daily harsh industrial applications while being compact and powerful simultaneously. The vacuum delivers high performance in a compact size without skimping on features like a detachable collection tank, multi-stage HEPA filtration (Choose HEPA model), and included accessories to help clean most daily cleanup needs.

The DP-E1-H industrial vacuum offers outstanding wet and dry performance producing a lift of 1905 mm and an air displacement of 163 m³/h. It features a true HEPA filtration system that delivers 99.97% filtration at 0.3 microns!

Don't need HEPA? The DP-E1 models give you all the powerful wet/dry pickup performance and accessories without advanced filtering.

	DP-E1	DP-E1- H
Air Flow:	163 m ³ /h	163 m ³ /h
Water Lift:	1905 mm	1905 mm
Noise Level:	70 db	70 db
Filter:	3.0 micron	0.3 micron, HEPA
Capacity:	15,1 liters	15,1 liters
Weight:	19 Kg	19,5 Kg

FEATURES

- Ergonomic Design
- Lightweight
- Easy to Use
- Stainless Steel Construction
- Includes Accessory Kit
- 0.3 Micron HEPA Filter (on HEPA model only)
- Detachable Collection Drum
- External Filter Shaker

REPLACEMENT FILTERS



STANDARD 3.0 MICRON
12 POCKET FILTER



0.3 MICRON
HEPA FILTER

Visit www.goodway.com to see more!



EXPLOSION PROOF VACUUMS



SPECIFICATIONS	VAC-EX-120-9-SS	DV-AV-9-EX	DV-AV-EP & DV-AV9-EX	VAC-EX-120-25SS	VAC-EX-AV-25SS
Motor(s)	Single	–	–	Single	–
Motor Power	1,2 kW	–	–	0,97 kW	–
Input Power	Standard: 10.5 Amps, 115 V, 60 Hz	–	–	Standard: 9 amps, 120 V, 60 Hz AC	–
Power Supply Cord	10,7 m	–	–	12,2 m, 14-3	–
Air Requirements	–	Minimum 3,5 BAR at 59 m ³ /h, Maximum 6,2 BAR at 85 m ³ /h	Minimum 3,4 BAR at 59 m ³ /h, Maximum 6,2 BAR at 85 m ³ /h	–	5,5 BAR at 68 m ³ /h
Air Line	–	12,7 mm	12,7 mm I,D, or larger	–	12,7 mm I,D, or larger
Static Water Lift	2413 mm	4064 mm at 6,2 BAR and 85 m ³ /h	4064 mm at 6,2 BAR	1778 mm	4572 mm at 19,3 BAR and 68 m ³ /h
Air Displacement	170 m ³ /h	212 m ³ /h at 6,2 BAR and 85 m ³ /h	212 m ³ /h at 6,2 BAR	225 m ³ /h	187 m ³ /h at 5,5 BAR and 68 m ³ /h
Filtration	0.3 microns HEPA 99.99%	1 micron an anti-static pocket and 0,3 micron HEPA	1 micron anti-static pocket	HEPA 99,995% at 0,3 micron	HEPA 99,995% at 0,3 micron
Tank	34 liters stainless steel	34 liters stainless steel	56,8 liters stainless steel	94,6 liters stainless steel	94,6 liters stainless steel
Dry Capacity	34 liters	34 liters	56,8 liters	60,5 liters	60,5 liters
Wet Capacity	–	–	–	64,3 liters	64,4 liters
Noise Level	74 dBA	76 dBA	74 dBA	75 dBA	70 dBA
Special Features	CSA US Certified	Air powered External filter shaker	Air powered External filter shaker Roll-out tank	–	–
Dimensions	1270 (H) x 495 mm (D)	1295 mm (H) x 381 mm (D)	1626 mm (H) x 520 mm (D)	1092 mm (H) x 686 mm (D)	1168 mm (H) x 762 mm (D)
Weight	40,8 Kg	44 Kg	60 Kg	45 Kg	40 Kg



GET RID OF DIRT IN HARD-TO-REACH PLACES



BPV-125 - Powerful and Comfortable Backpack



If you need to bring powerful vacuum suction to cramped areas, the BPV-125 vacuum has got your back. From stairwells to aisles, seats to shelving, this comfortable backpack unit goes wherever you need to take it. With over one full HP of cleaning power and a full set of attachments, this vacuum tackles tough dirt in tight corners like a pro. It comes with an integrated tool belt, so you'll save time by always having the right attachment at your fingertips.

BPV-125: Backpack Dry Vacuum, includes hose, wand and accessories

BPV-125H - Compact Backpack with HEPA Filter

Tiny nuisance particles can't escape from the large capacity HEPA filter while the bigger stuff stays trapped inside the paper collection bag. An integrated tool belt will save time by eliminating wasted trips looking for the right attachment.

BPV-125H: Backpack Dry HEPA Vacuum, includes hose, wand and accessories.



BPV-125-WK/BPV-125-A-WK (230V)

The fight against contaminants in your plant is at your front entrance, and now you've got another great tool in the battle. The BPV-125-WK/BPV-125-A-WK (230V) industrial vacuum is a small and quiet wall mounted cleaning powerhouse that delivers excellent vacuum performance. The 1.25 HP vacuum, combined with the specialized pickup attachment quickly remove dirt, and the 1-micron paper filtration effortlessly captures powders, dust, dander and solid contaminant from clothing and other outerwear.

BPV-125-WK/BPV-125-A-WK (230V): Wall Mounted Dry Vacuum, includes hose, wand and accessories.

FEATURES

- Paper filter collection bag
- Heavy-duty motor
- High-impact, molded plastic body
- Tool belt
- Multiple cleaning tools
- Includes hose, wand and tools
- HEPA filter (BPV-125H only)
- Wall mounts (BPV-125-WK/A-WK)

SPECIFICATIONS	BPV-125	BPV-125H	BPV-125-WK/BPV-125-A-WK (230V)
Motor Power	0,9 kW	0,9 kW	0,9 kW
Input Power	Standard: 10,5 amps, 115V 50/60 Hz	Standard: 10,5 amps, 115V 50/60 Hz	Standard: 9 amps, 115V 50/60 Hz AC, 230V, 50/60 Hz AC
Power Supply Cord	13,8 mv	13,8 m	14 m
Static Water Lift	3175 mm	3175 mm	2438 mm
Air Displacement	90 m³/h	90 m³/h	170 m³/h
Filtration	1 micron paper	1 microns paper and 0.3 microns HEPA	1 micron paper
Dry Capacity	3,3 liters	3,3 liters	3,3 liters
Noise Level	65 dBA	65 dBA	60 dBA
Dimensions	508 mm (H) x 304 mm (W) x 356 mm (D)	508 mm (H) x 304 mm (W) x 356 mm (D)	495 mm (H) x 241 mm (W) x 241 mm (D)
Weight	4,8 Kg	4,9 Kg	4.5 kg


JOB MATCHED TO FIT YOUR NEEDS




VAC-KIT-9-G



VAC-KIT-DIV2-D

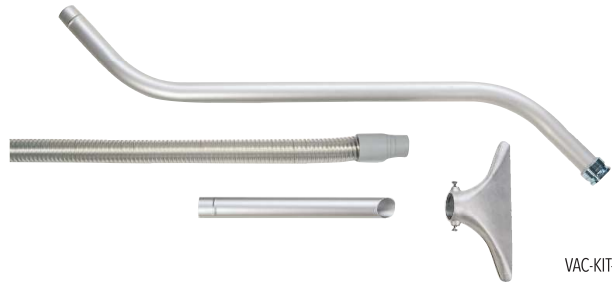

VAC-KIT-5-G

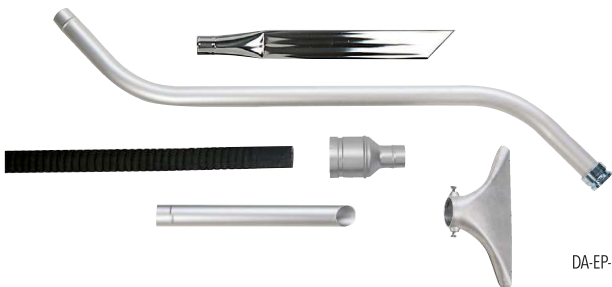

DA-EP-KIT



VAC-KIT-9-H

CARBON FIBER VACUUM ACCESSORY KITS:

VAC-KIT-DIV2-D: (For DV vacs), this kit also includes a carry bag.

VAC-KIT-DIV2-T: (For VAC-EX, VAC-2, VAC-3, AV-1200, and GTC-540 vacuums) includes carry bag.

AIR VACUUM ACCESSORY KITS*:

VAC-KIT-9-G: 38,1 mm Grounded Industrial Vacuum Accessory Kit: 4,5 m Neoprene Wire Reinforced Hose with Grounding Wire, 1371,6 mm Double Bend Wand, 1371,6 mm Extension Tube, 1,5 m Extension Tube, 355,6 mm Nylon Floor Brush, 355,6 mm Squeegee Floor Tool, 355,6 mm Rough Surface Fiber Shod Floor Tool, 203,2 mm Wall and Overhead Brush, and 685,8 mm Steel Crevice Tool.

VAC-KIT-5-G: 50,8 mm Grounded Bulk Pickup Vacuum Accessory Kit: 15' Smooth Bore PVC Hose with Grounding Wire, 1422,4 mm Double Bend Wand, 457,2 mm Bulk Pickup Nozzle, and 330,2 mm Aluminum Gulper Tool.

DA-EP-KIT: 50,8 mm Grounded DV Vacuum Accessory Kit: 4,5 m Neoprene Wire Reinforced Hose with Grounding Wire, Stainless Steel Hose Adapter for connecting DV Vacuums to 50,8 mm hoses, 1422,4 mm Double Bend Wand, 457,2 mm Bulk Pickup Nozzle, 330,2 mm Aluminum Gulper Tool, and 609,6 mm Steel Crevice Tool.

HEPA VACUUM ACCESSORY KIT*:

VAC-KIT-9-H: 38,1 mm HEPA Vacuum Accessory Kit: 4,5 m Smooth Bore PVC Hose, 1371,6 mm Double Bend Wand, 1371,6 mm Extension Tube, 1,5 m Extension Tube, 355,6 mm Nylon Floor Brush, 355,6 mm Squeegee Floor Tool, 355,6 mm Rough Surface Fiber Shod Floor Tool, 203,2 mm Wall and Overhead Brush, and 685,8 mm Steel Crevice Tool.

*Note: These accessories not for use with BPV and EV Vacuums.